

quality vents
that last

ATMOSVENT®



ATMOSVENT®

QUALITY VENTS THAT LAST

Atmosvent® roof vents are made-to-measure to suit nearly all rafter spacing requirements. Atmosvent® roof vents provide an ideal ventilation solution and can also help to reduce heat gain.

The Atmosvent® Aluminium range offers long-term durability in the most extreme environments, and is available in four thicknesses to suit nearly all glazing requirements. Atmosvents® are supplied unglazed for customers to fit their preferred glazing sheet option.

Unlike many conventional glazing vents, Atmosvent® has a track record of success with no reported leaks or product failures.

Atmosvents® are readily available with the options of electric openers and climate control to provide the most practical solution to your individual requirements.

The incorporation of the thermal breaks in the aluminium structure helps prevent cold external temperatures reaching the inside surfaces and causing excessive condensation.



Common uses:

- ✓ Conservatories
- ✓ Swimming Pools
- ✓ Industrial Skylight
- ✓ Shopping Malls
- ✓ Horticultural and Greenhouse Applications
- ✓ Equestrian Centres
- ✓ Livestock Areas

Qualities:

- ✓ Allows Essential Air Change
- ✓ Reduces Room Temperatures
- ✓ Long Lasting
- ✓ Virtually Maintenance Free
- ✓ Removable Lid
- ✓ Electronically Operated (Optional)
- ✓ Automatic Climate Control with Rain Sensor (Optional)
- ✓ Thermally Broken



Atmosvent®

This Atmosvent is designed to accept glazing materials such as polycarbonate or glass, above and below so that the vent is glazed part-way down your roof panel. The vent is designed as a bar to bar vent and will glaze into your roof bars resting on the rafters in the same way as your glazing panels.


Atmosvent® How to Work Out Lid Glazing Size

Calculations


W1 minus 130mm = W2 (Inside Glazing Size)

H1 minus 130mm = H2 (Inside Glazing Size)

Deduct 13mm from the lower glazing pane below the Atmosvent

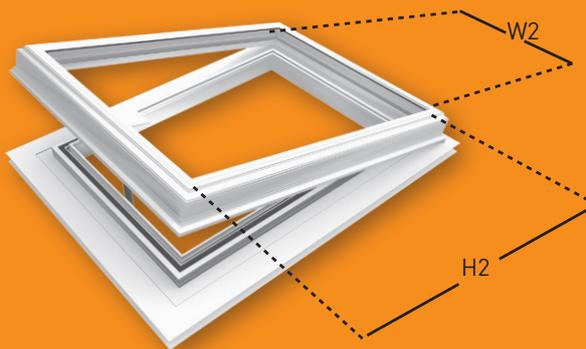

Atmosvent Aluminium Sizes

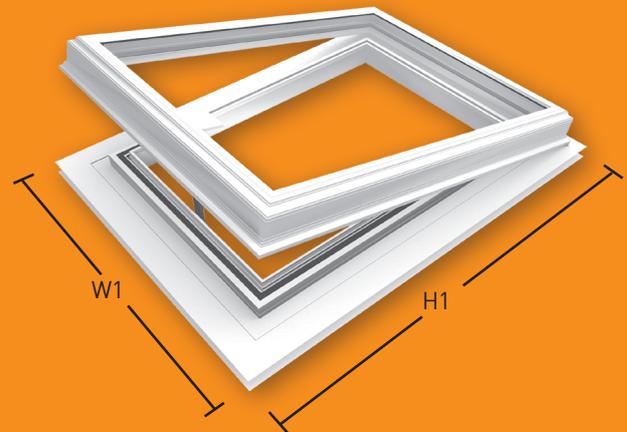

Atmosvent® Colours

Atmosvents® are available in white and three shades of brown as standard. In addition to this they can be supplied spray-painted to any other RAL or BS colour to match a specific background or adjacent frame colour.

Atmosvents® and associated glazing bars have been successfully supplied in various shades of green, cream, grey, blue and many more colours. Extra lead time should be allowed for special colours.

Accessories

All Atmosvent accessories are made from the highest quality materials. Our real wood handled crank handle offers the most cost effective opening solution, whilst our electric switch operated Atmosvents and climate control options offer the greatest automation for practical everyday use.



Glazing the Lid

Atmosvents are designed for a high quality roof vent solution. Please take extra care during handling and installation to ensure trouble-free performance.

This Atmosvent is designed to accept glazing from above and below however, you can glaze from one side only if you wish.

Where the glazing enters the "U" channel at either the top or the bottom of the vent it must be sealed both inside and out with a suitable silicone sealant, failure to do this will result in water leaks!

If you are only glazing below the Atmosvent it may be advisable to fit a spacer inside the top "H" section to reduce the risk of crushing whilst fitting any glazing beads.

The lid is fully removable for ease of installation and future maintenance.


To do this simply open the lid fully and you will be able to see a small grub screw inserted into each hinge, remove this and the hinge pins will push out releasing the lid, please remember to replace them later or the pins will ride out during use.

Glazing the lid is also simple, whilst you have it removed you will see that the retaining beads drop into a slot in the lid and then lift up into a second groove in the upper edge of the lid, these beads are known as "shuffle" beads.

Remove the beads from the lid and place in your glazing, now replace the beads top and bottom first and then the sides ensuring that they are in their slots. Now turn the lid over and push your glazing against the beads to lock them in.

Next you need to fit the wedge gasket between the inside face of your glazing and the inner edge of the vent lid. The wedge gasket provided has a curved side which you place against the glazing and a side with a groove in it, this groove is called a "lock throat" and is designed to clip over the vent lid and stop the gasket pulling out. So starting in one corner push the gasket in between the glazing and the Atmosvent lid cutting it where needed until you have done all four sides.

Refit your lid, attach your winder and your Atmosvent is now completely installed.

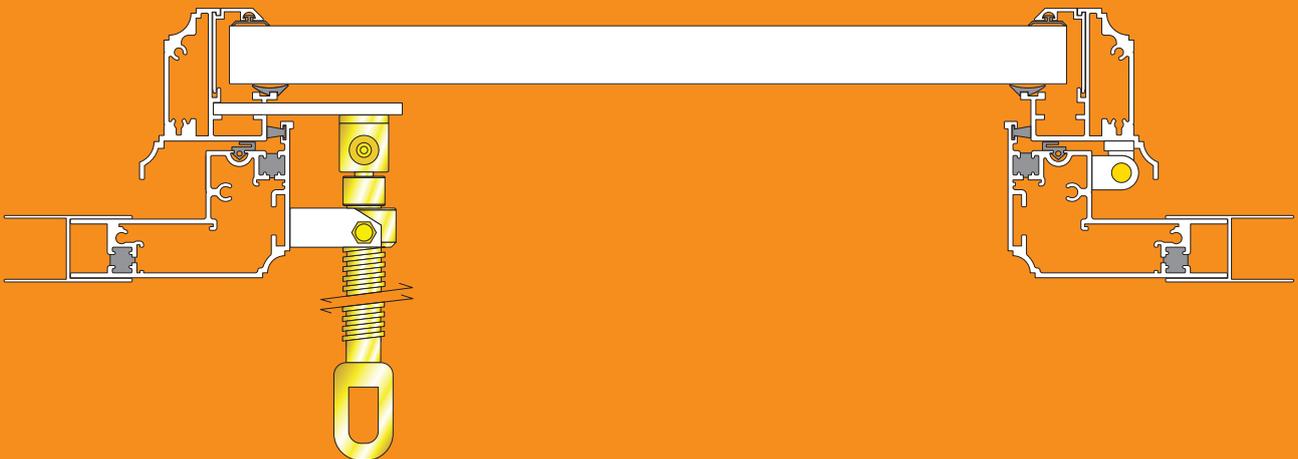

WARNING : REGISTERED DESIGNS

The IP of the designs in this brochure are protected by internationally registered design rights. Clear Amber will not hesitate to take appropriate legal action if its rights in this respect are infringed.

Inasmuch as the suppliers have no control over the circumstances in which our material may be used, we cannot guarantee that any particular results will be achieved. Users should carry out their own tests to determine the suitability of the material for their application.

Tel: 0845 384 44 44

Email: sales@clearamber.com

© Copyright - Clear Amber - September 2015. No part of this publication may be copied, reproduced, scanned, or stored in any electronic database, whether in whole or in part, in any form or by any means, without permission in writing from Clear Amber. Clear Amber will not hesitate to take appropriate legal action if its rights in this respect are infringed.