


AXGARD®

Solid Glazing Products Technical Guide

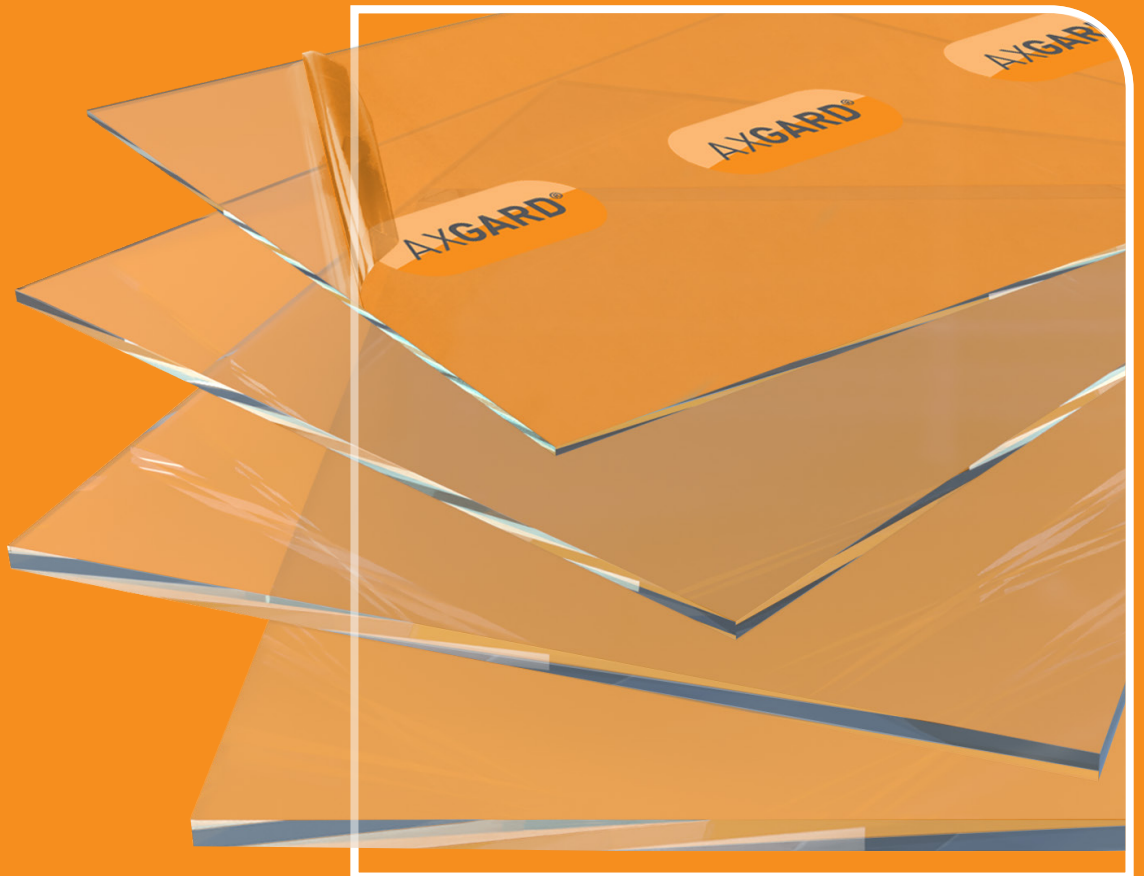

The Solid Glazing Solution

Axgard® is produced from one of the most advanced polymers produced today.

Axgard® combines unique strength, superior transparency, and proven durability, whilst remaining lightweight, flexible and fire resistant, making it the perfect security glazing material for any application.

Axgard® is virtually as transparent as glass, more than 200 times stronger, less than half the weight and is classed as virtually unbreakable. It is widely used in vandal-prone areas, high impact applications or where security is at risk.

Common uses:

- ✓ Solid Security Glazing
- ✓ Machine Guards
- ✓ Glazing in Schools, Prisons and Other Public Buildings
- ✓ Bus Shelters and Smoking Shelters
- ✓ Riot and Crowd-Control Shields
- ✓ Boat, Train, Bus and Aircraft Window Glazing
- ✓ Excavation and Forestry Plant Glazing
- ✓ Lighting and Signage
- ✓ Acoustic Barriers
- ✓ Stadium Roofing and Glazing
- ✓ Church Windows and Stained Glass Protection
- ✓ Barrel Vaults and Covered Walkways



Qualities:

- ✓ High Impact Strength
- ✓ Easy to Cut Onsite
- ✓ Excellent Wipe Clean Surface
- ✓ UV Stabilised
- ✓ Durable
- ✓ Class 1 Fire Rating
- ✓ Can Be Fixed Entirely with Specialised Adhesive
- ✓ Excellent Seal with Silicones




Axgard® : Clear Glazing Sheets

Axgard® clear sheets are the most popular choice for roof glazing, canopies, shelters, and many other glazing applications. Manufactured in a wide range of thicknesses, Axgard® clear sheets are available from 2mm thick to 12mm. The thinner 2mm gauge provides advantages of being the most cost effective solution and offers the greatest degree of flexibility. The thicker gauges such as 10mm and 12mm clear Axgard® provide greater strength and rigidity.

Axgard® Clear Sheet Sizes

| | |
|--|------|
| | 2mm |
| | 3mm |
| | 4mm |
| | 5mm |
| | 6mm |
| | 8mm |
| | 10mm |
| | 12mm |

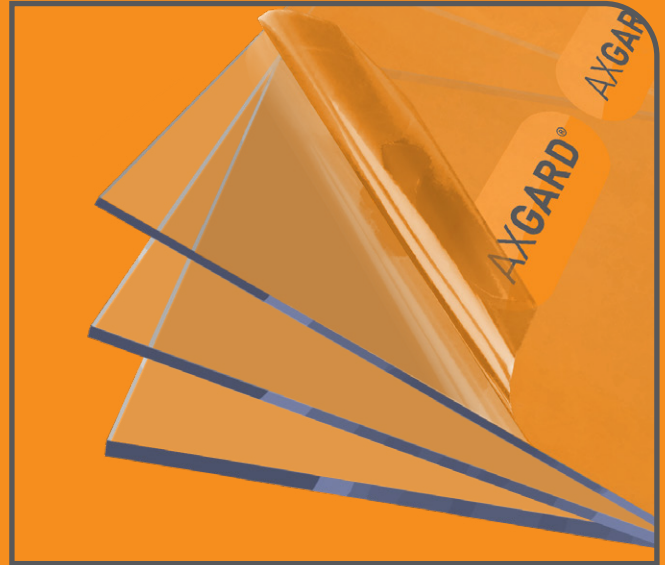

Axgard® clear glazing sheets - 4, 6 and 8mm

Axgard® Clear UV Protected Size Availability

| Metric Lengths (available in standard widths of 500mm, 1000mm and 2050mm or cut to size) | | | | | | | Thickness (code) | Imperial Lengths (available in standard widths of 620mm and 1250mm or cut to size) | | | | | |
|---|--------|--------|--------|--------|--------|--------|--------------------------|---|-------|--------|--------|--------|--------|
| 500mm | 1000mm | 1500mm | 2000mm | 3050mm | 4000mm | 6105mm | | 620mm | 675mm | 1020mm | 1240mm | 2050mm | 2500mm |
| ✓ | ✓ | ✓ | ✓ | ✓ | - | - | 2mm (AP2CUV) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | 3mm (AP3CUV) | ✓ | - | - | ✓ | - | ✓ |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | 4mm (AP4CUV) | ✓ | - | - | ✓ | - | ✓ |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | 5mm (AP5CUV) | - | ✓ | ✓ | - | ✓ | - |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | 6mm (AP6CUV) | ✓ | - | - | ✓ | - | ✓ |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | - | 8mm (AP8CUV) | ✓ | - | - | ✓ | - | ✓ |
| ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | - | 10mm (AP10CUV) | ✓ | - | - | ✓ | - | ✓ |
| ✓ | ✓ | ✓ | ✓ | ✓ | - | - | 12mm (AP12CUV) | - | - | - | - | - | - |

Axgard® : Patterned Glazing Sheets

The Axgard® patterned finish provides privacy whilst maintaining a good level of light transmission. This is very popular for industrial glazing applications, and security areas.

Axgard® Patterned Sheet Sizes

| | |
|--|-----|
| | 3mm |
| | 4mm |
| | 6mm |



Axgard® 4mm patterned glazing sheet

AXGARD® Patterned UV Protected Size Availability

| Thickness (code) | Metric Lengths (available in standard widths of 500mm, 1000mm and 2050mm or cut to size) | | | | |
|------------------------|---|--------|--------|--------|--------|
| | 500mm | 1000mm | 1500mm | 2000mm | 3050mm |
| 3mm (AP3PUV) | ✓ | ✓ | ✓ | ✓ | ✓ |
| 4mm (AP4PUV) | ✓ | ✓ | ✓ | ✓ | ✓ |
| 6mm (AP6PUV) | ✓ | ✓ | ✓ | ✓ | ✓ |

Key Benefits:

- ✓ Provides Privacy
- ✓ Maintains Great Light Transmission
- ✓ Allows a Degree of Visibility Whilst Retaining Privacy

Axgard® : Bronze Glazing Sheets

Bronze tint Axgard® offers a tinted solution which reduces glare and provides shade. The darker colour will encourage heat absorption.

Axgard® Patterned Sheet Sizes

| | |
|--|-----|
| | 4mm |
| | 5mm |



Axgard® 4mm bronze glazing sheet

Axgard® Bronze UV Protected Size Availability

| Thickness (code) | Metric Lengths (available in standard widths of 500mm, 1000mm and 2050mm or cut to size) | | | | | |
|------------------------|---|--------|--------|--------|--------|--------|
| | 500mm | 1000mm | 1500mm | 2000mm | 3050mm | 6105mm |
| 4mm (AP4BUV) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 5mm (AP5BUV) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

Key Benefits:

- ✓ Provides Shading from Glare
- ✓ Stylish Tint for Applications such as Boat Windows

Axgard® : Opal Glazing Sheets

Our opal Axgard® option provides both privacy, shading and heat rejection properties and is very popular in many glazing applications including backlit projects.

Axgard® Opal Sheet Sizes

| | |
|--|-----|
| | 3mm |
| | 5mm |



Axgard® 3mm Opal glazing sheet

Axgard® Opal UV Protected Size Availability

| Thickness (code) | Metric Lengths (available in standard widths of 500mm, 1000mm and 2050mm or cut to size) | | | | | | |
|------------------------|---|--------|--------|--------|--------|--------|--------|
| | 500mm | 1000mm | 1500mm | 2000mm | 3050mm | 4000mm | 6105mm |
| 3mm (AP30UV) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| 5mm (AP50UV) | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

Key Benefits:

- ✓ Allows Approximately 30% Light Transmission
- ✓ Provides Privacy
- ✓ Removes Almost All Visibility
- ✓ Provides Even White Tint

Axgard® : Black Glazing Sheets

Axgard® black sheet is a solid black colour which is ideal for blackout areas where light transmission is not required.

Axgard® Black Sheet Sizes

| | |
|--|-----|
| | 3mm |
| | 6mm |



Axgard® 3mm black glazing sheet

Axgard® Black UV Protected Size Availability


| Thickness (code) | Metric Lengths (available in standard widths of 500mm, 1000mm and 2050mm or cut to size) | | | | |
|------------------------|---|--------|--------|--------|--------|
| | 500mm | 1000mm | 1500mm | 2000mm | 3050mm |
| 3mm (AP3KUV) | ✓ | ✓ | ✓ | ✓ | ✓ |
| 6mm (AP6KUV) | ✓ | ✓ | ✓ | ✓ | ✓ |

Key Benefits:


- ✓ Complete Opaque
- ✓ Provides Block from Light
- ✓ Offers Total Privacy

Axgard® : Installation with Alukap®-XR

An example lean-to rafter supported roof with Alukap®-XR glazing bars and Axgard® sheets

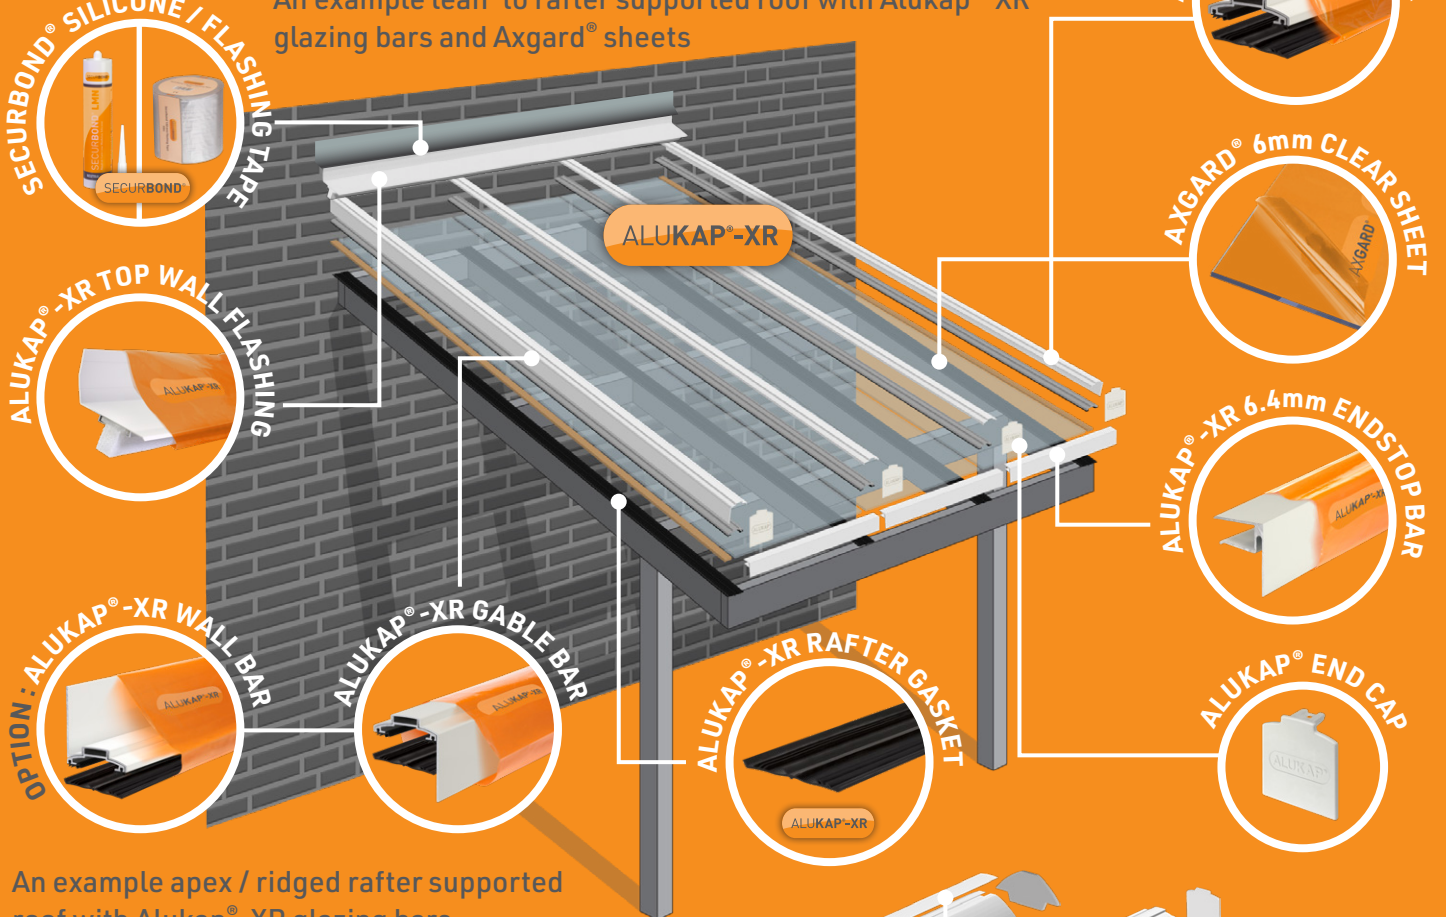

An example apex / ridged rafter supported roof with Alukap®-XR glazing bars

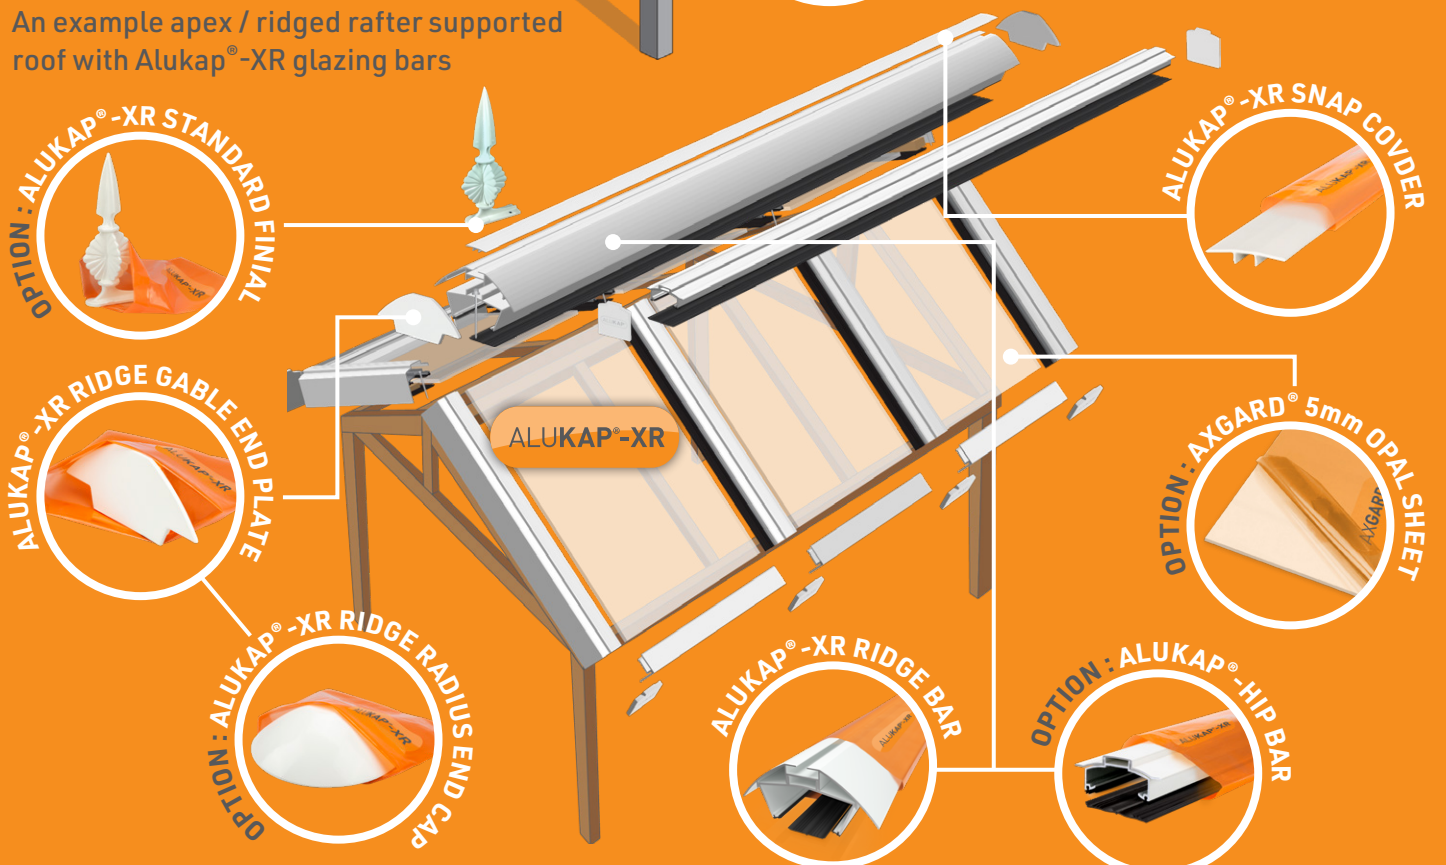


Axgard® : Installation with Alukap®-SS



Axgard® : Installation with Sekosnap®

Sekosnap® provides a high quality secondary glazing system that is affordable and provides all the features that are required for the perfect result! The Patented and Registered design of Sekosnap® secondary glazing system allows it to be used with either 2mm or 3mm Axgard® and provides a huge range of benefits for use in general housing, recreational, public, commercial and listed buildings.

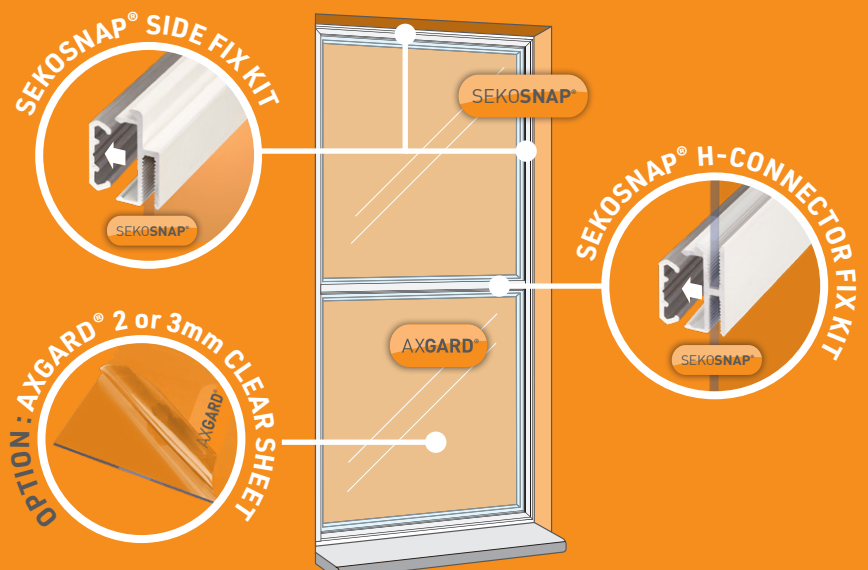

Axgard® : Easy to Cut and Shape

Axgard® can be cut to any shape using the latest automated CNC machinery. Also holes for fixing, speaker areas and hinges for example can also be drilled at any diameter.



[View Our How 2 Cut Axgard® Video](#)

Axgard® : Drilling Holes on Site

Standard twist drills for wood or metal can be used to drill Axgard®; however, slower speeds and feed rates are required for best results in producing clean, non-gummed holes. In most situations, acceptable holes with minimal shavings are produced on Axgard® sheets with a 5-speed drill press operating at speeds from 500 to 2500 rpm.

Twist drills for Axgard® sheet should have 2 flutes, a point with an included angle of 60° to 90°, and a lip clearance of 12° to 18°, as shown in the following figure. These factors help to reduce the heat by allowing the cuttings to escape easily as the hole is drilled.


For larger diameter holes in Axgard® sheets it is recommended that the rpm speed is reduced. With all drilling it is important that the Axgard® sheet is well secured during drilling to prevent vibration causing any chipping or cracking.

Depending on actual final application of the Axgard®, it is generally recommended that holes are drilled 1.5 times bigger than the screw diameter to account for sheet expansion.

During the drilling process it is recommended that the drill is backed out often to free chips, especially when drilling deep holes. Water or compressed air can be used on thicker sheets to cool the sheet and prevent overheating.

It is recommended that tests are carried out for each specific application. Free Axgard® samples are available for testing purposes.

Cutting clearance

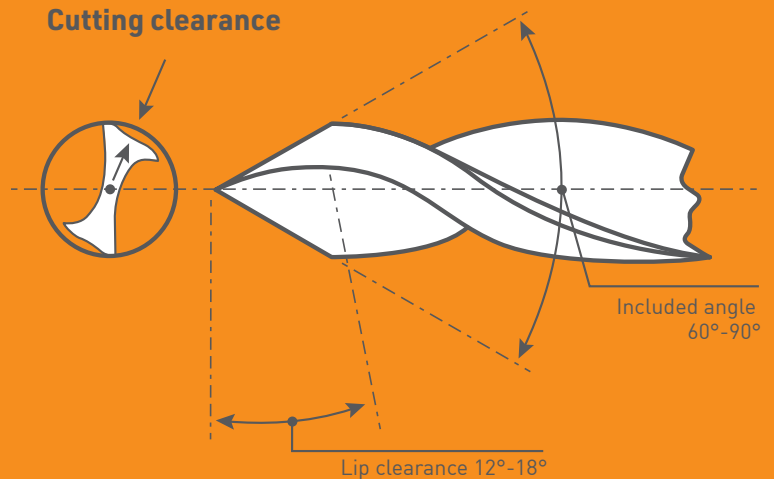


[View Our How 2 Drill Axgard® Video](#)


Axgard® : Spanning Guide

The following charts below provide spanning guides for Axgard® sheets when clamped on two sides in the first chart or clamped four sides on the second chart. Most applications use Glazing Bars to install Axgard® so are classed as 'Two Sides Fixed' so please refer to the top table.

Two Sides Fixed

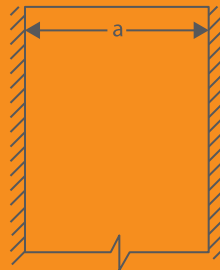

Four Sides Fixed

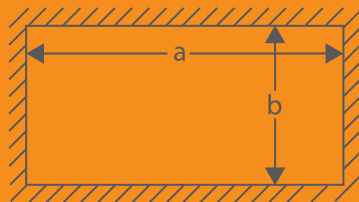

Axgard® (Minimum thickness suggested)

| Sheet width - a (mm) | Load -q (n/m ²) | | | |
|-------------------------|-----------------------------|-----|-----|------|
| | 600 | 750 | 850 | 1000 |
| 400 | 3 | 4 | 4 | 4 |
| 450 | 4 | 4 | 4 | 4 |
| 500 | 4 | 4 | 5 | 5 |
| 550 | 5 | 5 | 5 | 5 |
| 600 | 5 | 5 | 5 | 6 |
| 650 | 5 | 6 | 6 | 6 |
| 700 | 6 | 6 | 6 | 8 |
| 750 | 6 | 6 | 8 | 8 |
| 800 | 6 | 8 | 8 | 8 |
| 850 | 8 | 8 | 8 | 8 |

The calculations have been made for a maximum deflection of 2% on the minimum width/length. See disclaimer.

Axgard® (Four sides fixed)

| Sheet width - a (mm) | q = 600 N/m ² | | | q = 750 N/m ² | | | q = 850 N/m ² | | | q = 1000 N/m ² | | |
|-------------------------|--------------------------|-------|-----|--------------------------|-------|-----|--------------------------|-------|-----|---------------------------|-------|-----|
| | a:b relation | | | a:b relation | | | a:b relation | | | a:b relation | | |
| | >1:2 | 1:1.5 | 1:1 | >1:2 | 1:1.5 | 1:1 | >1:2 | 1:1.5 | 1:1 | >1:2 | 1:1.5 | 1:1 |
| 400 | 3 | 3 | 3 | 4 | 3 | 3 | 4 | 4 | 3 | 4 | 4 | 3 |
| 450 | 4 | 4 | 3 | 4 | 4 | 3 | 4 | 4 | 3 | 4 | 4 | 4 |
| 500 | 4 | 4 | 3 | 4 | 4 | 4 | 5 | 4 | 4 | 5 | 5 | 4 |
| 550 | 5 | 4 | 4 | 5 | 5 | 4 | 5 | 5 | 4 | 5 | 5 | 4 |
| 600 | 5 | 5 | 4 | 5 | 5 | 4 | 5 | 5 | 4 | 6 | 5 | 5 |
| 650 | 5 | 5 | 4 | 6 | 5 | 5 | 6 | 6 | 5 | 6 | 6 | 5 |
| 700 | 6 | 5 | 5 | 6 | 6 | 5 | 6 | 6 | 5 | 8 | 6 | 5 |
| 750 | 6 | 6 | 5 | 6 | 6 | 5 | 8 | 6 | 5 | 8 | 8 | 6 |
| 800 | 6 | 6 | 5 | 8 | 6 | 5 | 8 | 8 | 6 | 8 | 8 | 6 |
| 850 | 8 | 6 | 5 | 8 | 8 | 6 | 8 | 8 | 6 | 8 | 8 | 6 |
| 900 | 8 | 8 | 6 | 8 | 8 | 6 | 8 | 8 | 6 | 8 | 8 | 8 |
| 950 | 8 | 8 | 6 | 8 | 8 | 6 | 8 | 8 | 8 | 9 | 8 | 8 |
| 1000 | 8 | 8 | 6 | - | - | - | - | - | - | - | - | - |
| 1050 | 8 | 8 | 8 | - | - | - | - | - | - | - | - | - |

All loads are unfactored and based on uniformly distributed loads (UDL).

The calculations have been made for a maximum deflection of 2% on the minimum width/length

Inasmuch as Clear Amber have no control over the circumstances in which our material may be used, or site specific parameters, we cannot guarantee that any particular results will be achieved. Users should carry out their own tests to determine the suitability of the material for their application. Installers should

satisfy themselves that published permissible loadings for AXGARD® glazing, together with any supporting posts, frames, or walls and fixings, are sufficient to provide adequate strength for the intended use and to meet regional loading requirements. Installers should also obtain their own job-specific structural engineer's report for their individual site. Samples are readily available to users to test and verify the exact sizes according to their site requirements.

Service Temperature

Axgard® has a service temperature range from **-50°C** to **+100°C**, withstanding up to **+120°C** for short term exposure. This makes it suitable for use in any climate.

Flammability Tests

Polycarbonate has one of the highest melting points of any thermoplastic material and resists flame spread across its surface. The following table shows the high ratings achieved in building standards fire tests.

| Standard | Classification |
|----------------------------|-------------------|
| NSP 92501,4 | M1(1mm) |
| NSP 92501,4 | M2(1.5 à 12mm) |
| BS 476/7 | Class 1 |
| DIN 4102 | B1,B2 |
| CSE RF 2/75/A, CSE RF 3/77 | Class 1 |
| UL Classified | V2 (File e221255) |
| ASTMD-635 | CC1 |


Weight/Area Ratio

The specific gravity of Axgard® sheet is 1.2, which is about half that of glass. The following table shows the ratio between the weight of Axgard® sheets of various thicknesses and glass.

| Sheet Thickness mm | (in.) | Axgard® kg/m2 | (lb/ft2) | Glass kg/m2 | (lb/ft2) |
|-----------------------|--------|------------------|----------|----------------|----------|
| 2 | (0.08) | 2.40 | (0.491) | 4.90 | (1.00) |
| 3 | (0.12) | 3.60 | (0.737) | 7.34 | (1.50) |
| 4 | (0.16) | 4.80 | (0.983) | 9.80 | (2.00) |
| 5 | (0.20) | 6.00 | (1.23) | 12.24 | (2.51) |
| 6 | (0.24) | 7.20 | (1.47) | 14.68 | (3.00) |
| 8 | (0.31) | 9.60 | (1.97) | 19.60 | (4.01) |
| 10 | (0.39) | 12.00 | (2.46) | 24.48 | (5.01) |

Axgard® polycarbonate **almost totally blocks harmful UV radiation** whilst still allowing exceptional levels of visible light transmission. The graph below shows comparisons with other products.

Axgard® Light Transmission

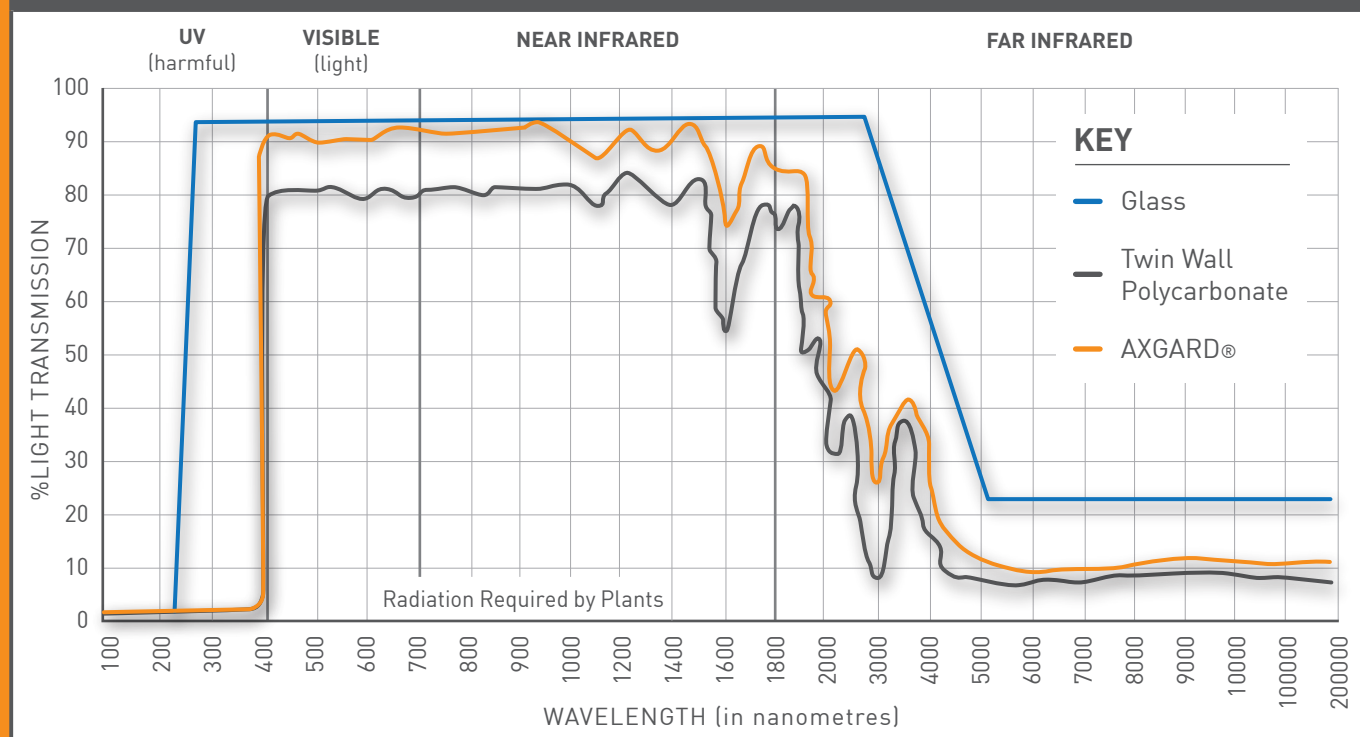


Weather Resistance


Axgard® sheet has an extra UV protective layer on both sides which greatly improves resistance against UV radiation. Estimated changes in optical properties of 3mm Axgard® compared to standard polycarbonate under accelerated UV exposure (QUV) are shown in these diagrams below. 100 hours of QUV exposure is roughly equivalent to one year actual outdoor exposure of mediterranean weather. The changes in optical properties of Axgard® are very minimal making Axgard® an excellent choice for enhanced longevity.

The table of properties below shows some additional characteristics and qualities of Axgard® sheet material, the combination of which makes Axgard® a world class security glazing material.

% Light Transmission

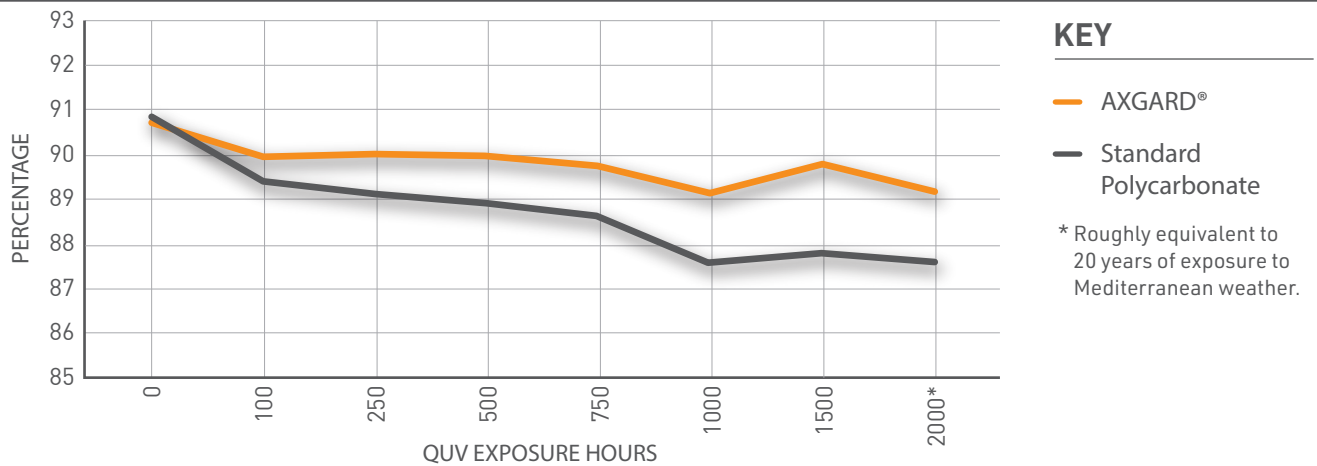

Change in Yellowness Index

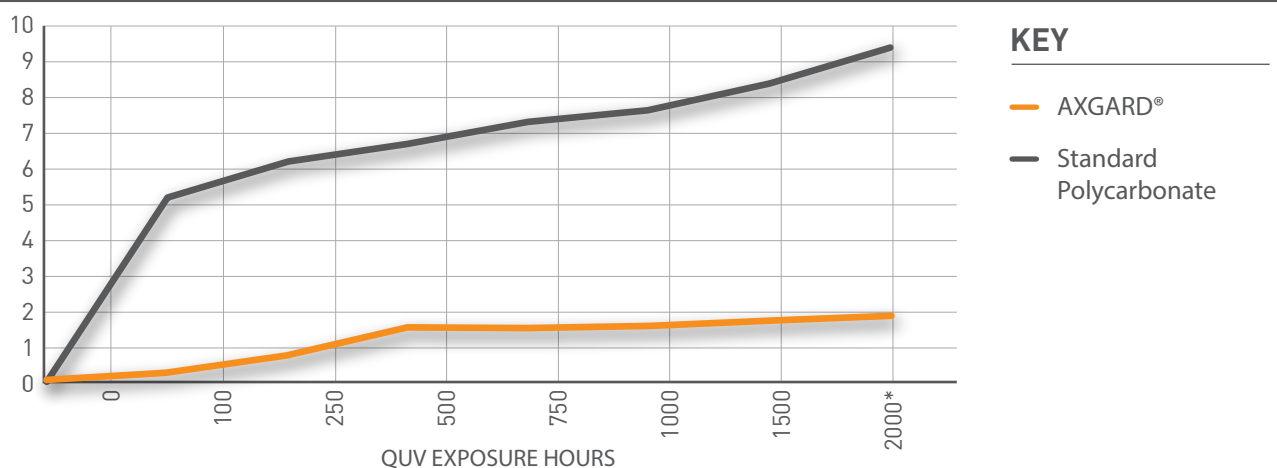

Cold Bending

Axgard® may be installed with a stressed curve to create an arch or dome, as long as the curve and resulting stress is within specified limits. This stress will fall within an acceptable limit and there will be no effect on the sheet characteristics if the magnitude of the radius is at least 200 times that of the sheet thickness, as indicated in the following table.

| Radius Desired - mm (inches) | Thickness Required - mm (inches) |
|------------------------------|----------------------------------|
| 600 (24) | 3 (0.12) |
| 800 (31) | 4 (0.16) |
| 1000 (39) | 5 (0.20) |
| 1200 (47) | 6 (0.24) |
| 1600 (63) | 8 (0.31) |

| | Property | Conditions | ASTM Method | Units-SI | Value |
|------------|--|----------------|------------------------|--------------------------|----------------------|
| Physical | Density | | D-1505 | g/cm ³ | 1.2 |
| | Water absorption | 24 hr. @ 23°C | D-570 | % | 0.15 |
| Mechanical | Tensile strength at yield | 10mm/min | D-638 | MPa | 65 |
| | Tensile strength at break | 10mm/min | D-638 | MPa | 60 |
| | Elongation at yield | 10mm/min | D-638 | % | 6 |
| | Elongation at break | 10mm/min | D-638 | % | >90 |
| | Tensile modulus of elasticity | 10mm/min | D-638 | MPa | 2,300 |
| | Flexural modulus | 1.3mm/min | D-790 | MPa | 2,500 |
| | Flexural strength at yield | 1.3mm/min | D-790 | MPa | 100 |
| | Notch impact strength izod | 23°C | D-256 | J/m | 800 |
| | Charpy impact strength notched | 23°C | ISO 180 | Kj/m ² | 55 |
| | Impact falling weight | 3mm sheet | ISO-663/1 ^a | J | 158 |
| | Rockwell hardness | | D-785 | R scale | 125 |
| Thermal | Long term service temp | | | °C | -50 to +100 |
| | Short term service temp | | | °C | -50 to +120 |
| | Heat deflection temp | Load: 1.82 MPa | D-648 | °C | 135 |
| | Vicat softening temp | Load: 1kg | D-1525 | °C | 150 |
| | Co-efficient of linear thermal expansion | | D-696 | 10 ⁻⁵ cm/cm°C | 6.5 |
| | Thermal conductivity | | C-177 | W/m K | 0.21 |
| | Specific heat capacity | | C-351 | kJ/kg K | 1.26 |
| Optical | Haze | | D-1003 | % | <0.5 |
| | Light transmission | | D-1003 | % | 89 |
| | Refractive index | | D-542 | | 1.586 |
| | Yellowness index | | D-1925 | | <1 |
| Electrical | Dielectric constant | 1kHz | D-150 | | 3.0 |
| | | 1MHz | D-150 | | 2.9 |
| | Dissipation factor | 1kHz | D-150 | | 0.001 |
| | | 1MHz | D-150 | | 0.01 |
| | Dielectric strength short time | 500 V/s | D-149 | kV/mm | >30 |
| | Surface resistance | Ketley | D-257 | Ohm | 5.1x10 ¹⁵ |
| | Volume resistance | Ketley | D-257 | Ohm-cm | 1.3x10 ¹⁷ |

Hotline Bending and Thermoforming

Axgard® can also be 'hot-line' bent and thermoformed provided specific instructions are followed, which are available on request.

Chemical Resistance

Whilst Axgard® is resistant to many everyday chemicals, some stronger chemicals can attack the sheet reducing its strength and clarity.

Installation

Compatible fixings, adhesives and sealants must always be used when installing Axgard®. Also the polythene film must be removed immediately after installation.

Cleaning

For best results use clean 100% cotton cloth and large quantities of mild detergent solution. Where very regular cleaning is essential we recommend Axgard®-SR which has a scratch resistant coating.

WARNING : REGISTERED DESIGNS & PATENTS

The IP of the designs in this brochure are protected by internationally registered design rights. Many products are also protected with active or pending Patents. Clear Amber will not hesitate to take appropriate legal action if its rights in this respect are infringed.

© Copyright - Clear Amber Group Ltd - June 2025. No part of this publication may be copied, reproduced, scanned, or stored in any electronic database, whether in whole or in part, in any form or by any means, without permission in writing from Clear Amber. Clear Amber will not hesitate to take appropriate legal action if its rights in this respect are infringed.

Inasmuch as Clear Amber have no control over the circumstances in which our material may be used, or site specific parameters, we cannot guarantee that any particular results will be achieved. Users should carry out their own tests to determine the suitability of the material for their application.